



Niches, Curbs, Shower Seats & Slopes

ProSpec PreFormed Products require no special training, so professional contractors and do-it-yourselfers can simply measure, cut, place and fasten in minutes, not hours. Their single-piece, waterproof construction won't

leak or require ongoing caulking maintenance. Used along with ProSpec's complete line of tile installation products, the end result is superior quality substrate preparation.

Niches

ProSpec niches offer an innovative alternative to traditional soap and shampoo fixtures as well as a decorative nook for kitchen items or accents for tiled fireplaces.

ProSpec niches are easy to install and ready to tile in minutes. Their unique "in-wall" design allows them to be tiled with the same tile as the surrounding walls.

Their sturdy, single-piece construction prevents leaks. ProSpec niches will not rot or degrade over time. They also ensure that no condensation will build up inside the wall.



PF-306
Rectangular
21" H x 12" W*



PF-304
Wide Combo
21" H x 12" W*



PF-309
Medium Combo
21" H x 8" W*



PF-305
Narrow Combo
21" H x 6" W*



PF-301
Square
12" H x 12" W*



PF-303
Square
8" H x 8" W*



PF-308
Soap Dish
6" H x 6" W*

* NOTE: All nominal dimensions are of the interior cavity. All niches are designed for 16" O.C. walls.

Curbs

ProSpec curb components are fast and easy to install. They're ideal for use with traditional PVC pan liners. ProSpec curbs achieve a watertight, durable and cost-saving substrate suitable for all varieties of tile. The unique construction and dimensions of ProSpec curbs ensure a professional finish every time. The curbs are manufactured to allow for the industry "pre-slope" required under all shower pans.



Door Jambs




Platform Edges



Countertop Edges



Knee Walls

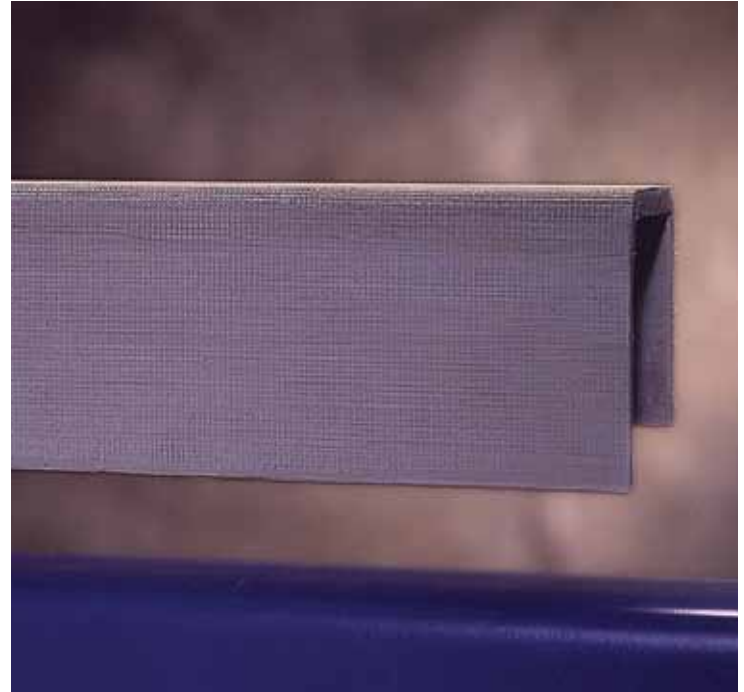


PF-201 (4' length); PF-202 (8' length); 3.625" interior dimension

Shower Seats

ProSpec Shower Seats install with ease. These sturdy seats are made of high-density material and contain no wood or cellulose fibers. They're waterproof and lightweight.




NOTE: ProSpec Preformed Shower Seats are waterproof. It is important that the outside coating remains in tact and not damaged. Do not cut the Shower Seats.

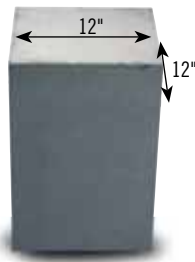


PF-410

12" x 12" Square




PF-404

16" x 16" Triangle-Convex

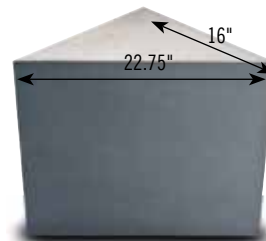

PF-402

16" x 16" Triangle

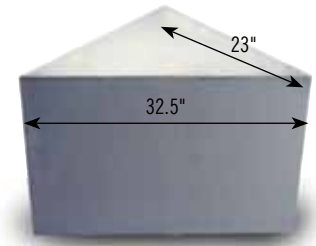

PF-403

23" x 23" Triangle

NOTE: All seats are 20" high. Seats hold 28.5 lbs. per square inch or 4,100 lbs. per square foot.

Slopes

Designed to adhere to the tile industry specified 1/4" sloped fill, the ProSpec PF-102 slope complies with guidelines noted in the Tile Council of America Handbook. The panels are excellent for cut-to-fit site applications and allow you to easily install the pan liner, mortar bed, and tile in one day.

PF-102 slopes are made of waterproof materials that will not rot or degrade. The use of ProSpec PF-102 slopes is essential for proper mortar bed drainage that helps reduce the growth of molds and fungi common in tiled shower pan applications.



PF-102 (24" x 48" / 3/4" to 1/4" tapered) standard dimension

Note: It is the user's responsibility to ensure waterproofness prior to tiling.



8201 Arrowridge Boulevard
Charlotte, NC 28273
1.800.738.1621

www.prospec.com

REV 03/09